
795A Pneumatic Grips

500N / 112 lbf



General purpose pneumatic vise grips suitable for flat or sheeted materials such as paper, tissue paper, paperboard, plastic film, nonwovens, elastomers and textiles.

Part Number:	795-2100
Clamping Force:	940 N (212 lbf) @ 4.1 bar (60 psi)
Maximum Tensile Strength:	500 N (112 lbf)
Body:	Anodized Aluminium
Temperature Range:	0°C to +70°C
Weight:	750 g per grip without jaws
Opening:	0-10 mm (depending on installed jaws)

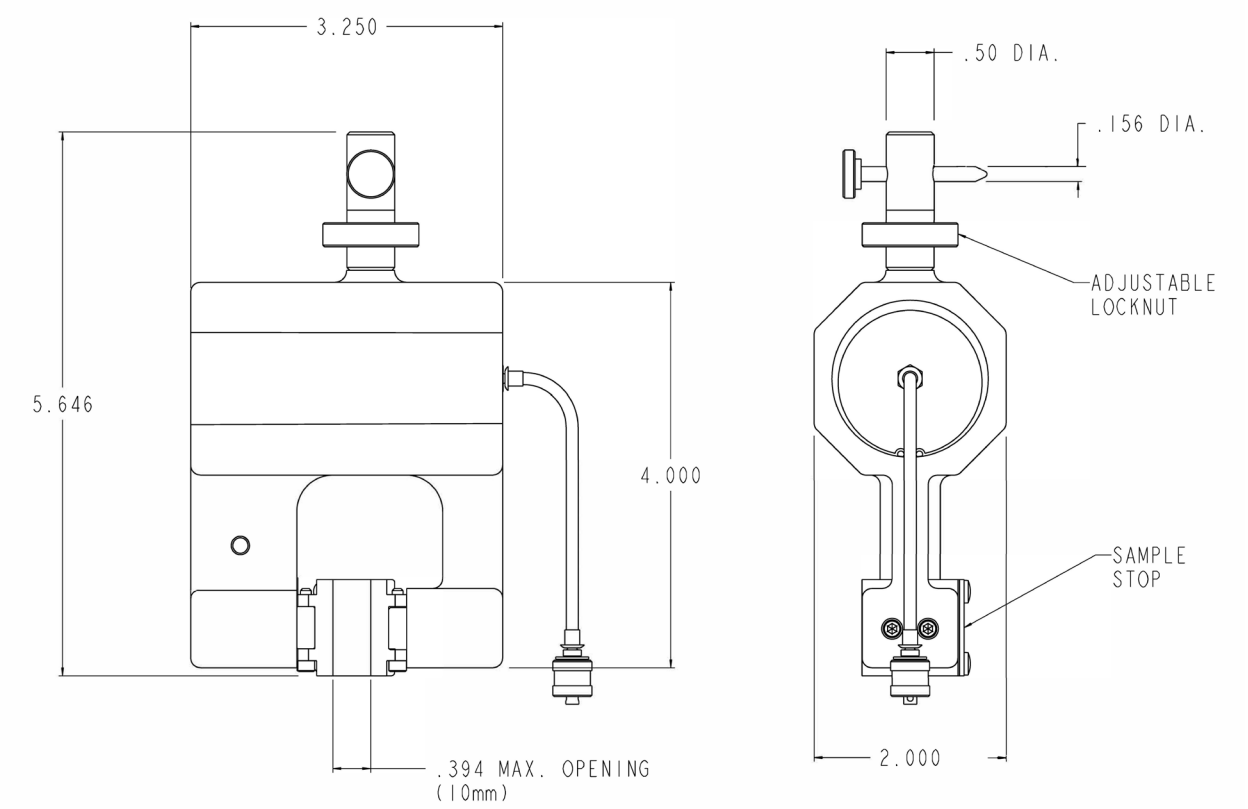

Thwing-Albert Instrument Company


TA031725

thwingalbert.com


Common Jaw Options for 795A Pneumatic Grips

Part Number	Surface	Clamping Surface (H x W)	Opening	Weight/ Jaw
00795-0171	Smooth	1″ x 1″	0-10 mm	30 g
00795-0171R	Rubber Coated	1″ x 1″	0-8 mm	35 g
00795-0171S	Serrated	1″ x 1″	0-10 mm	30 g
00795-0171DS	Pyramid Serrated	1″ x 1″	0-10 mm	30 g
00795-0171LC	Line Contact	0.0625 R x 1″	0-9 mm	35 g
00795-0181	Smooth	1″ x 2″	0-10 mm	60 g
00795-0181R	Rubber Coated	1″ x 2″	0-8 mm	70 g
00795-0181S	Serrated	1″ x 2″	0-10 mm	60 g
00795-0181DS	Pyramid Serrated	1″ x 2″	0-10 mm	60 g
00795-0181LC	Line Contact	0.0625 R x 2″	0-9 mm	70 g
00795-0173	Smooth	1″ x 3″	0-10 mm	90 g
00795-0173R	Rubber Coated	1″ x 3″	0-8 mm	100 g
00795-0173S	Serrated	1″ x 3″	0-10 mm	90 g
00795-0173DS	Pyramid Serrated	1″ x 3″	0-10 mm	90 g
00795-0173LC	Line Contact	0.0625 R x 3″	0-9 mm	100 g


Additional sizes available upon request.
Requires 2 jaws per grip | 4 jaws for a pair of grips




Blank (Smooth)





Serrated

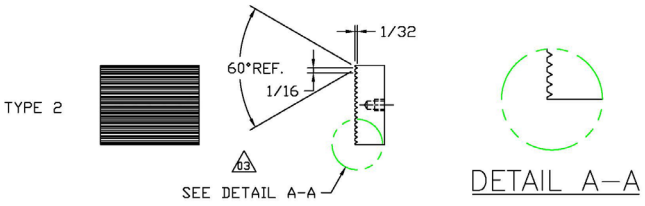





Rubber





Pyramid Serrated

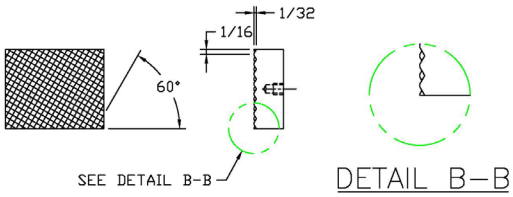



Line Contact

