Eccentric Roller Grip

TAS766

TAS766-5-2L
Eccentric roller grip

The TAS766 Eccentric Roller Grip features a symmetric design and self-tightening non-slip gripping action. Coupling with 2 pin holes allows the grip to be turned at 90° in a tensile machine.

- Tensile force: 5 kN
- Opening 0-15 mm
- Standard coupling: Af159 or Af20


  Further couplings on request
- Roller: 30 mm Ø, 50 mm wide,


  pyramid (serrated)
- Body: Steel, nickel-plated
- Temperature range: 0° … +70°C


  Further temperature ranges on request
- Weight: 1.4 kg per grip
- Scope of delivery: 1 pair



Serrated Roller Surface



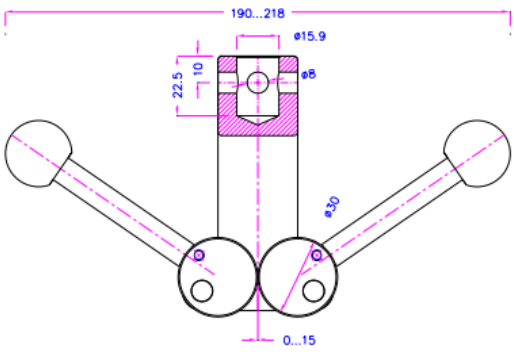

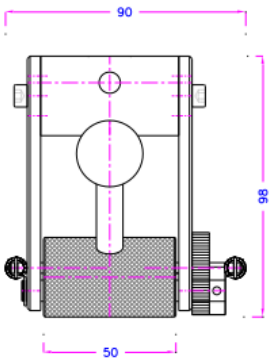

Eccentric Roller Grip


TAS766

TAS766-1-W20
Custom Eccentric roller grip option

- Tensile force: 1 kN
- Opening 0-10 mm
- Standard coupling: Af159
- Roller: 25 mm Ø, 20 mm wide
- Pyramid (serrated)
- Body: Steel, nickel-plated
- Temperature range: 0° to +70°C

  Further temperature ranges on request
- Weight: 0.5 kg per grip
- Scope of delivery: 1 pair of grips



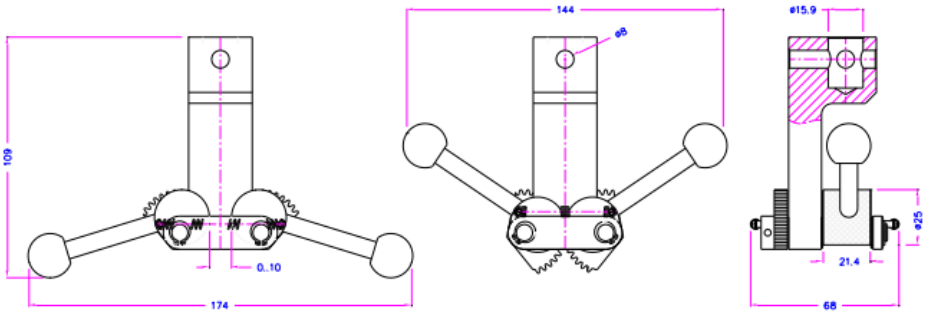

Eccentric Roller Grip

TAS766

TAS766-40
Custom Eccentric roller grip

- Tensile force: 5 kN
- Opening 40 mm
- Roller: 101 mm Ø, 50 mm wide, smooth
- Body: Steel, nickel-plated
- Weight: 2 kg per grip
- Scope of delivery: 1 pair



